

HYLOAD™ CTEM WATERPROOFING WS

COAL TAR ELASTOMERIC MEMBRANE (CTEM) WATERPROOFING SYSTEMS

a total System Warranty


in a Protected Membrane Roof Assembly (PMR)

CTEM WATERPROOFING WS combines the time proven benefits of coal tar pitch with the advanced technology from DuPont's Elvaloy® KEE. This unique combination of raw materials provides you with a high performance hot air welded seam (WS) self-adhered membrane. CTEM sheet Waterproofing membrane was developed in Europe in the mid 1960's for use in bridge deck waterproofing and roofing type of applications. The CTEM sheet membrane is coated with an SBS asphalt adhesive compound that eliminates the need for a kettle during installation. The resurgence of PMR applications where extended wet conditions may be an issue and installation flexibility is an advantage that makes CTEM Waterproofing WS the ultimate choice for moisture protection.

CTEM WATERPROOFING WS PMR ASSEMBLY consists of Hyload CTEM Waterproofing WS membrane (1 or 2 ply systems), moisture resistant extruded polystyrene insulation and concrete pavers...a winning combination of products that have proven their performance and durability are tops in the industry.


THE CTEM WATERPROOFING WS SYSTEM offers a single source warranty that provides comprehensive protection covering both material and workmanship for the CTEM, insulation and pavers as follows:

- **Watertight integrity** of a self-adhered membrane system without exclusion for ponded water
- **Long lasting retention** of insulation's high thermal performance
- **Pavers are warranted** against concave/convex warpage and breakage due to manufactures defect or freeze/thaw
- **REMOVAL AND REINSTALLATION** of pavers for warranted repairs during warranty time period

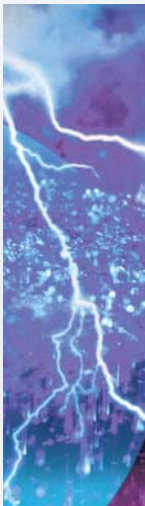

Hyload CTEM Waterproofing WS

Protected Membrane Roofing Assemblies

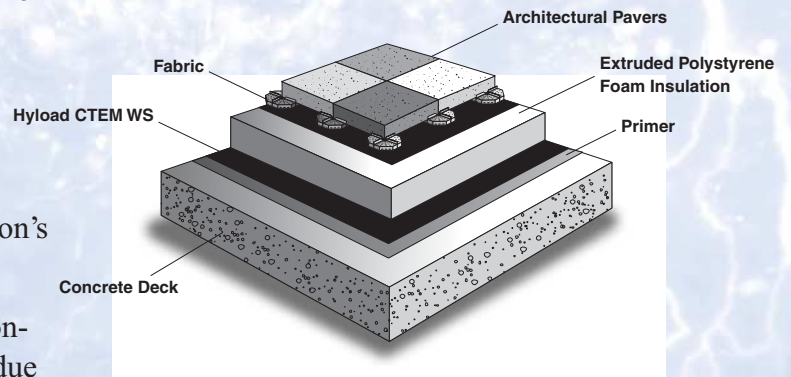

HYLOAD
ROOFING SYSTEMS

HYLOAD, INC.
9976 RITTMAN RD., WADSWORTH, OH 44281
PH: 800 457 4056 FAX: 330 336 5512

HYLOAD WS

CTEM WATERPROOFING WS

CTEM Sheet Waterproofing WS


- ◆ Coal Tar /Elvaloy based membrane
- ◆ No ponding water exceptions
- ◆ Resistant to grease, acids and oils
- ◆ Does not contribute to mold growth
- ◆ VOC compliant
- ◆ Self-adhered sheet with welded seam integrity
- ◆ Fast, Cost effective installation

Extruded Polystyrene Insulation

- ◆ Superior R-value of 5 per inch of thickness
- ◆ Excellent moisture resistance
- ◆ 90% Long term R-value retention
- ◆ Recycled content
- ◆ Built-in drainage channels on bottom edges
- ◆ High compressive strength

Pressed Concrete Pavers

- ◆ Sub-surface drainage
- ◆ Hides unsightly roof system drains
- ◆ ADA slip resistant walking surface
- ◆ Converts roof area to useable public outdoor space
- ◆ Protection for Insulation & waterproofing system
- ◆ Class A Fire rating
- ◆ Provides design and color opportunities

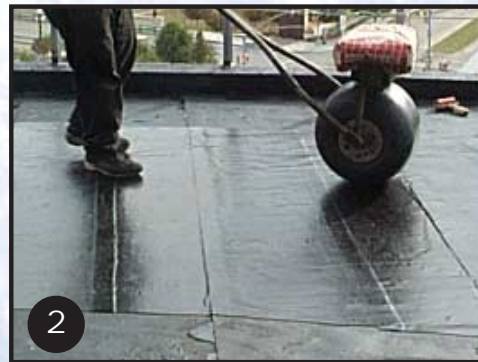

HYLOAD
ROOFING SYSTEMS

HYLOAD, INC.
9976 RITTMAN RD., WADSWORTH, OH 44281
PH: 800 457 4056 FAX: 330 336 5512
eMail: info@hyload.com
www.hyload.com

To reach your local Sales Specialists
contact Hyload's Corporate Office
at 800-457-4056.